


Paper Pattern

Fabric: Lyco Linen 50% TENCEL, 50% Organic Cotton Linen
 Width 137 cm (54 inches), Length 250 cm (100 inches)

Same Edge Colour: Seam Join

- - - : Fold
- — : Placing
- ← → : Dimensions
- //// : Bias tape

Scale 1:10
 Paper Size: A4

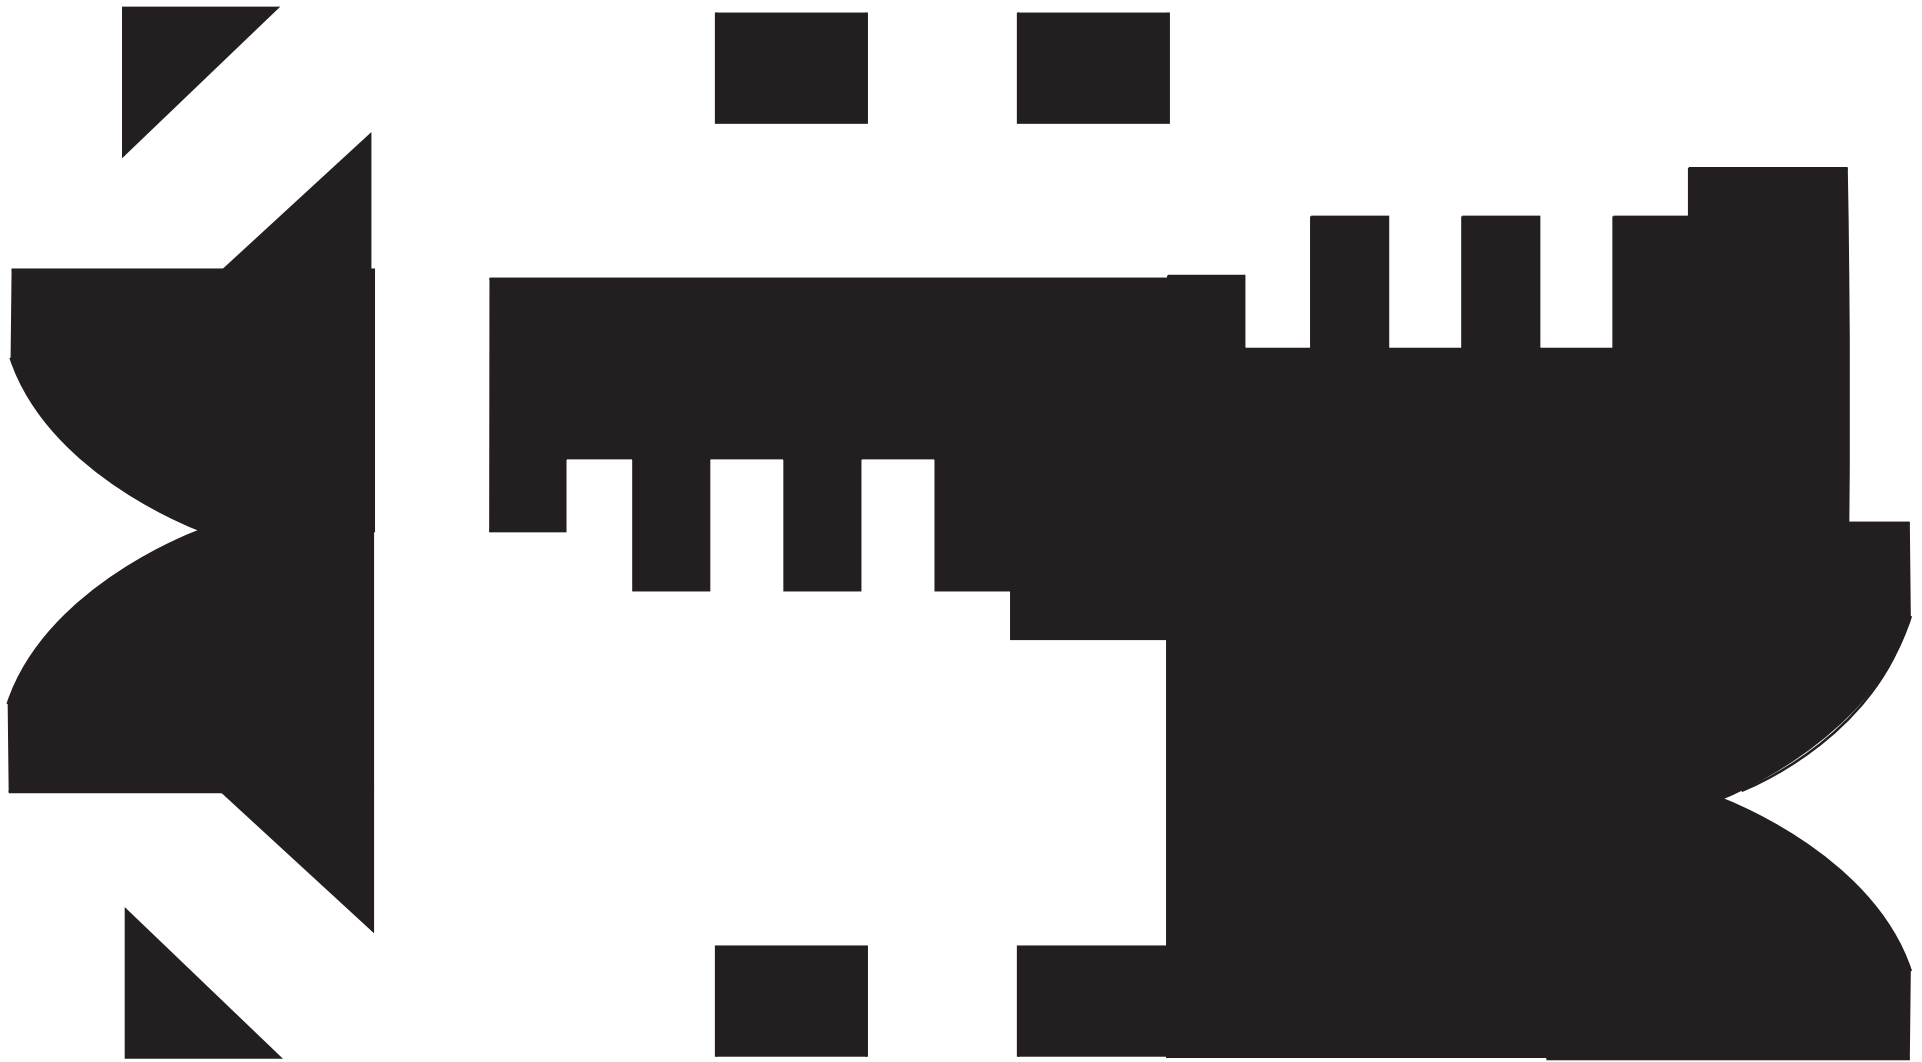


Dazzle Puzzle Jacket by Felicia Angelina

DAZZLE PUZZLE ASSEMBLY

SLEEVES

1. Put bias tape on top of the sleeves pattern, place it at the edge, sew 0.5 cm.
2. When you reach the corner or edge, backstitch. Cut bias tape longer than the edge. About an extra 1 cm
3. Repeat until all edges of the sleeves all covered with bias tape. Leave out the left and right edges.
4. Finish the bias tape in all corners by sewing the intersection together, then fold the excess fabric.
5. Fold and iron bias tape to the inside, sew topstitch all round.
6. Overlock long edges then fold the fabric into half (good side facing each other. Sew long edges together. Flip and iron, it will look like Figure 1.

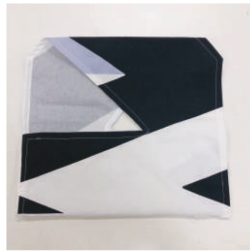

POCKET

1. Put the patch pocket 1 on top of patch pocket 1 connector, sew them together on the wrong side so they create a square. Overlock all the edges.
2. Mark the side 2 cm each from the edge, the top 2 cm, and the bottom 1.5 cm. Fold toward the wrong side of fabric and iron.
3. Mark the pocket placement on the front bodice lining 17 cm is the middle point, 12 cm from top edges.
4. Sew the pocket to the front bodice lining, top stitch.
5. Repeat on the other side.

FRONT BODY

1. Align the front bodice 1 and front lining 1 together, sew both on the wrong side. Leave 3 cm on the top open. To make pointy corner : put a string or thick thread between the corner.

2. Flip to the good side through that 3 cm gap, iron 1 cm

BACK BODICE

1. Overlock all sides, mark the pleat, fold, and iron. Then, sew the pleat on a 1 cm allowance.
2. Sew the edges together shown on the colour coded cutting pattern. with a 1 cm allowance
3. Take the back lining and sew topstitch to across with of the bodice, shown on cutting pattern
4. Sew on buttons as shown on cutting pattern
5. Bias tape the rest of the edges.

SIDE POCKET

1. Place side pocket A1 on top of side pocket A2 sew them together (on the wrong side fabric). Leave one longer side open.
2. Overlock side pocket lining A. Join it together with side pocket A ,leave the same longer side open as pocket A. Then, sew the middle part.
3. Flip side pocket and insert the lining, then use overlocking to finish the edge.

HOOD

1. Make a buttonhole on the hood lining by marking 3.5 from the edge sides and bottom. The buttonhole size 2.5 cm.
2. Make a mark on the hood 3.5 cm width across the hood.
3. Take the cord pattern, fold the allowance in (1.5 cm each sides). Fold again in the middle and topstitch.
4. Put the cord from the centre back on the hood lining. Sew the cord on that lines.
5. Take the slot pattern then overlock all the edges. place it on top of the hood lining (wrong side). Then sew together. Sew along the long sides and leave two openings on the short edges.
6. Take hood panel and hood panel lining (triangle shapes) overlock all the edges. Sew it together 1 cm seam allowance on the wrong side, pattern facing each other. Leave out the straight edge and flip it.
7. Take hood fold it good side facing each other. Sew the curve 1 cm allowance. Repeat with hood lining.
8. Connect the lining and the hood at the head opening with a 1 cm seam allowance. Stitch on the wrong side of the fabric and flip around trough the opening. You only have an opening at the shoulder side.
8. Sew pleat by marking 2 cm from the slot stitch, 5 cm then another 5 cm. Fold in the mark and make them meet then tag stitch.
9. Attach hood panel to bottom of hood, as shown on cutting pattern.

ASSEMBLE

1. Put the sleeves in between the front and the back bodice. Sew front part of the sleeves with the front, and back part of sleeves with back bodice.
2. Moving on to the side pocket. Mark 42 cm from the top as a placement for side pocket. Then, attach the side pocket by sewing them from the wrong side.
3. Attach the hoodie with the front bodice, sew the back of the hood with the back and front bodice. Leaving out the hood panel
4. Fold the lining 1 cm allowance then pin, sew from the backside, sink stitch (Sew between the lines)
5. Measure buttonhole 3 cm in from the edges 2 cm width. Mark the placement for the button too below the buttonhole.
6. Sew the button.