


Paper Pattern
 Fabric: Lyco Linen 50% TENCEL, 50% Organic Cotton Linen
 Width 140, Length 250 cm (100 inches)

Same Edge Colour: Seam Join
 - - - - : Fold
 — — — — : Placing
 \longleftrightarrow : Dimensions
 // // // // : Bias tape

Scale 1:10
 Paper Size: A4

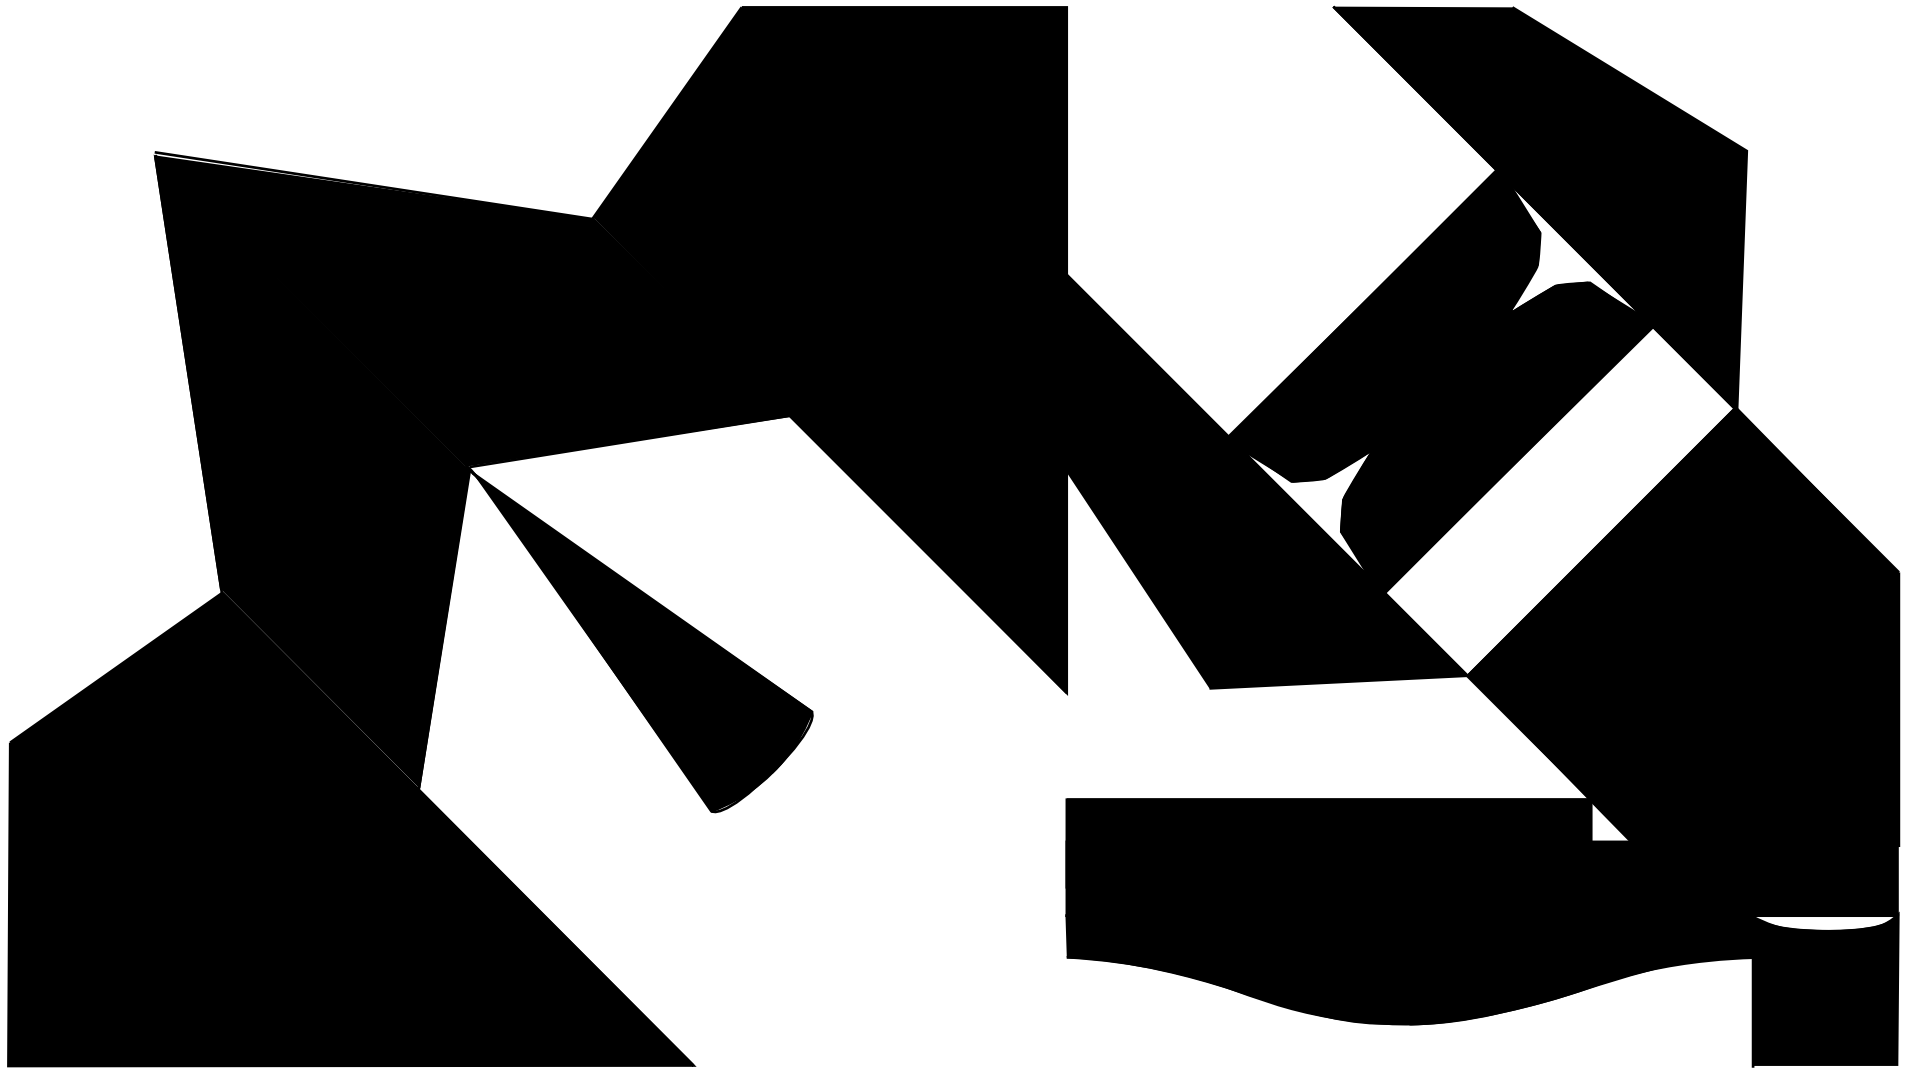

Moth Trench Coat by Jamie Han

JAMIE

Cut out pattern, include seam allowances.

MAIN BODICE

1. Sew piece 2a to the Front Right slanted edge 'D' of 1(Main Bodice/MB) with a French seam.
2. Repeat for piece 2b on the other side.
3. Sew piece 3b to piece 4b along edge 'E' at 1cm allowance. Overlock or Zigzag stitch edge 'E' to finish it.
4. Double fold hem (0.5cm+0.5cm) all 6 edges (excluding edge 'B') of [3b + 4b].
5. Repeat steps for attaching [3a to 4a].
6. Double fold hem the 3 edges (excluding edge 'A') of pieces 6a and 6b.
7. Pin 6b and 4b along the BACK right slanted edge 'A' & 'B' of 1(MB).
8. Pin 6a and 4a along the BACK left slanted edge 'A' & 'B' of 1(MB).
9. Make sure they align nicely side by side with no gaps.
10. Sew the pieces along the > at 1cm allowance.

You can overlock/zigzag stitch / bias tape seam to finish it.

BELT / STRAP PIECES

11. Fold 10. (Long Belt Strap) in half lengthwise and sew at 1cm seam allowance.
12. Turn the tube inside out and sew 2 straight lines at 0.5cm from the edge to secure the strap flatly. Remember to turn the 2 ends in to sew down so it becomes a Belt with no raw openings.
13. Fold Pieces '14. Side front straps' in half lengthwise + one side of the width, and sew at 1cm seam allowance.
14. Turn the tube inside out and sew 2 straight lines at 0.5cm from the edge to secure the strap flatly.
15. Overlock the raw width edge. (this is the 'I' Strap)
16. Repeat for the other strap piece. (attached at I to 1.MB on both sides later)
17. Fold Pieces 9. Center front straps in half widthwise and sew 2 straight lines at 1cm seam allowance along length.
18. Turn the tube inside out and sew 2 straight lines at 0.5cm from the edge to secure the strap flatly.
19. Overlock the raw width edge. (this is the J strap) Repeat for the other 'J' strap piece.
20. Pin the 'J' straps to 1(MB) at point 'J' along the flat edge, right sides touching. Sew at 1cm. Repeat for the other 'J' strap.

21. Pin the 'I' straps to 1(MB) at point 'I' along the flat edge, right sides touching. Sew at 1cm. Repeat for the other 'I' strap.
22. Sew 2 belt loops. using the remaining fabric at the side of the Long Belt Strap at point I and I on MB.
23. Attach belt loops at point I. The long Belt strap will fit through them later on.

COLLAR + FACING

24. After interfacing the collar piece (Use 2x Collar 13.), place the right sides together and stitch 1cm along the collar edges as shown on cutting pattern. Turn it inside out and then topstitch along the edge at 0.5cm.
25. After interfacing the lapel piece (Use second lapel piece to make 2x lapel), place the right sides together and stitch 1cm along the curved edges as shown in pattern. Turn it inside out and then topstitch along the edge at 0.5cm.
26. Pin both lapel pieces to 1(MB) along slanted edge 'G' right sides touching on both sides.
27. Pin Collar piece to 1(MB) along neckline 'H'. Collar and lapel pieces should 'meet' at the seam allowance stitch point. (there will be some hand sewing needed later on.)
28. Now for facing. Overlock all edges of the facing pieces.
29. Sew the 7a.Upper Facing (L) piece and 7b.Upper Facing (R) piece to Square piece along edge 'K'.
30. Trim edge 'H' of the square piece a little for it to be curved matching the neckline of 1(MB).
31. Pin [Upper Facing (L) + Square piece + Upper Facing (R)] to the neckline (edge G H G) above the collar and lapel pieces, right (printed) sides touching.
32. Pin 8a (L) to piece 2b and 8b (R) to piece 2a along the edges 'F'. Connect them on the main bodice at D.
33. Now all layers are sandwiched together by pins, topstitch at 1cm seam allowance to secure the front opening neckline. Snip notches at the rounded neckline if you have to. Alternatively you can overlock the seam narrower to 0.7cm.
34. Turn the Facing pieces in, straighten out the seam and iron them flat. Top stitch the 3 layers at 0.5cm along the neckline and down the opening lines.
35. Overlock around piece 16. Thorax Facing. Sew it to 15. Square back facing at the bottom.
36. Double fold hem (0.5+0.5cm) around the remaining raw edges on the main bodice and long edges of 2a and 2b.

SLEEVES

37. Sleeves: French seam the under arm edges together.
38. Double fold and hem the sleeve opening and the ^ pointed lines carefully, as it is cut on bias and might warp if stretched.
39. Interface the triangle and overlock the edges. Attach it on the ^ part of the sleeve by topstitching a triangle down.
40. Mark a buttonhole placement on the ^ edge as 'C'
41. Interface point C of the main bodice on the wrong side at both shoulders.
42. Sew 2 buttons at that point per side. (The sleeve is therefore detachable and can be worn from either under or above.)
43. Done!

Description of pattern



- 1. Main Bodice
- 2a. Front Right Wing
- 2b. Front Left Wing
- 3a. Back Left Outer Wing
- 3b. Back Right Outer Wing

- 4a. Back Left Middle Wing
- 4b. Back Right Middle Wing
- 5a. Right Sleeve
- 5b. Left Sleeve
- 6a. Back Left Inner Wing
- 6b. Back Right Inner Wing

- 7a. Inner Facing Left
- 7b. Inner Facing Right
- 8a. Inner Facing Left
- 8b. Inner Facing Right

- 9. Center Front Straps x 2
- 10. Long Belt Strap
- 11. Belt Loops x 2
- 12. Lapels x 4
- 13. Collar x 2

- 14. Side Front Straps x 2
- 15. Square Back Facing
- 16. Thorax Facing

 Interfaced triangle x 2 >  Applique to this position